

## CIR-V3DEMI1602G

DDR3 DIMM 1600MHz 2GB with ECC

### Description

The CIR-V3DEMI1602G is 256M words X 72 bits, 1 rank. Unbuffered Dual In-Line Memory Module (ECC-DIMM). DDR3 SDRAMs in Fine Ball Grid Array(FBGA) packages on a 240pin glass-epoxy substrate. Provide a high performance 8 byte interface in 133.35mm width form factor of industry standard. It is suitable for easy interchange and addition.

### Specifications

Density	2GB
Pin Count	240pin
Type	Unbuffered
Dimensions	133.35mm x 30.0mm
ECC	With ECC
Component Config	256M x 8 bit
Data Rate	1600 MHz
CAS Latency	11
Voltage	1.5V / 1.35V
PCB Layers	6
Operating Temp.(TCASE)	0°C~+85°C
Module Ranks	Single Rank


### Features

- JEDEC Standard 240-pin Dual In-Line Memory Module
- Power Supply: VDD= 1.5V (1.425V to 1.575V) & VDD= 1.35V (1.283V to 1.45V)
- Golden Connector (Au: 30u")
- Inputs and Outputs are SSTL-15 compatible
- CAS (READ) latency (CL): 6, 7, 8, 9, 10,11
- Bi-Directional Differential Data Strobe
- DLL aligns DQ and DQS transition with CK transition
- Eight Internal banks for concurrent operation (components)
- Refresh: Auto-refresh, self-refresh
- Burst Length (BL) switch on-the-fly BL8 or BC4(Burst Chop)
- Support ECC function
- On-Die-Termination (ODT) for better signal quality
- RoHS Compliant (Lead Free) Memory module

### Speed Grade

Frequency Grade	Data Transfer Rate	CAS Latency Support						CL-tRCD-tRP
		CL6	CL7	CL8	CL9	CL10	CL11	
DDR3-1600	PC3-12800	800	1066	1066	1333	1333	1600	11-11-11

### Package Dimensions

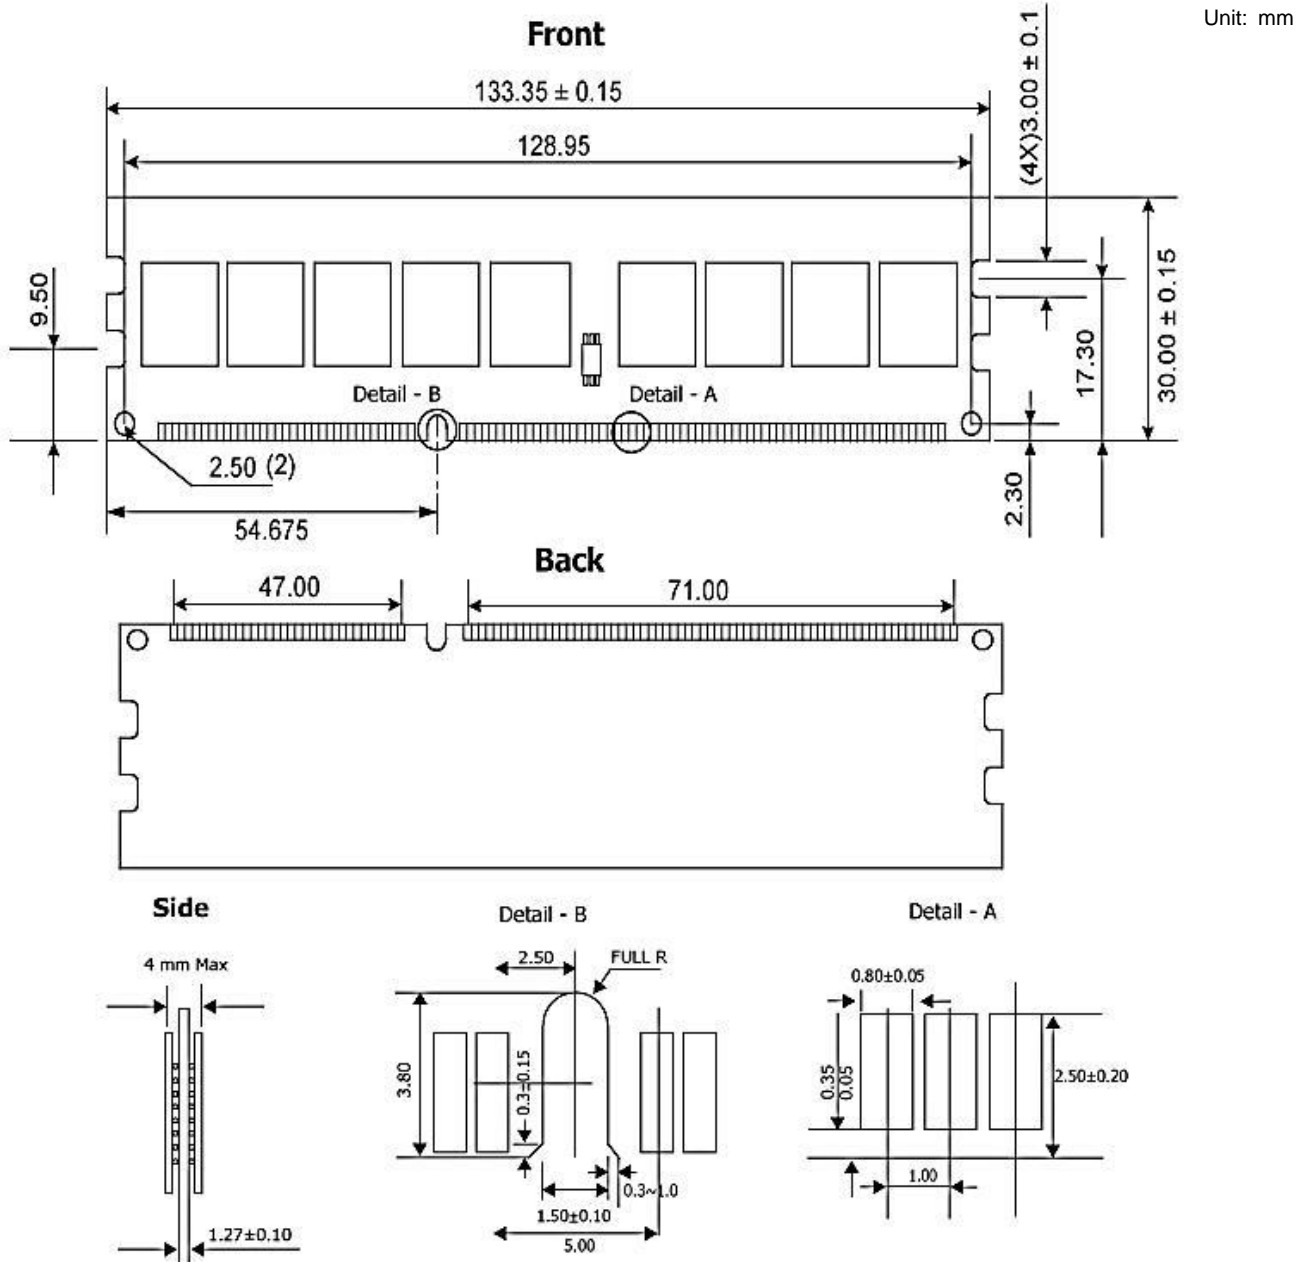

Tolerances :  $\pm 0.15\text{mm}$  unless otherwise specified