

CIR-S5SUSE5608G

DDR5 SO-DIMM 5600MHz 8GB

Description

CIR-S5SUSE5608G is a 1G x 64-bit (8GB) DDR5-5600 CL46 SDRAM (Synchronous DRAM), 1Rx16, memory module, based on eight 1G x 16-bit FBGA components. The SPD is programmed to JEDEC standard latency DDR5-5600 timing of 46-45-45 at 1.1V. Each 262-pin SO-DIMM uses gold contact fingers. Power management integrated circuit (PMIC) provides better signal integrity and more stable power. Original DRAM chips and all components are stringently tested for the highest level of compatibility, reliability, and performance.

Specifications

Density	8GB
Pin Count	262pin
Type	Unbuffered
Dimensions	69.60mm x 30.00mm
ECC	Non-ECC
Component Config	1G x 16 bit
Data Rate	5600 MHz
CAS Latency	46
Voltage	1.1V
PCB Layers	10
Operating Temp.(TCASE)	0°C~+85°C
Module Ranks	Single Rank


Features

- JEDEC Standard 262-pin Small Outline Dual In-Line Memory Module
- VDD = VDDQ = 1.1V (1.067V~1.166V)
- VPP = VDDSPD =1.8V
- Programmable /CAS Latency: 22,26,28,30,32,36,40,42,46,50
- PMIC on DIMM, nominal supply 5V, VIN_Bulk input supply range: 4.25 V to 5.5 V
- On-die, internal, adjustable VREF generation for DQ,CA,CS
- 16n-bit prefetch
- Two independent I/O sub channels
- On-Die ECC
- SPD Hub with Thermal Sensor
- Fly-By topology
- Terminated control, command and address bus
- RoHS Compliant and Halogen free

Speed Grade

Frequency Grade	Data Transfer Rate	CAS Latency Support			CL-tRCD-tRP
		CL40	TBC	CL46	
DDR5-5600	PC5-44800	4800	TBC	5600	46-45-45

Package Dimensions

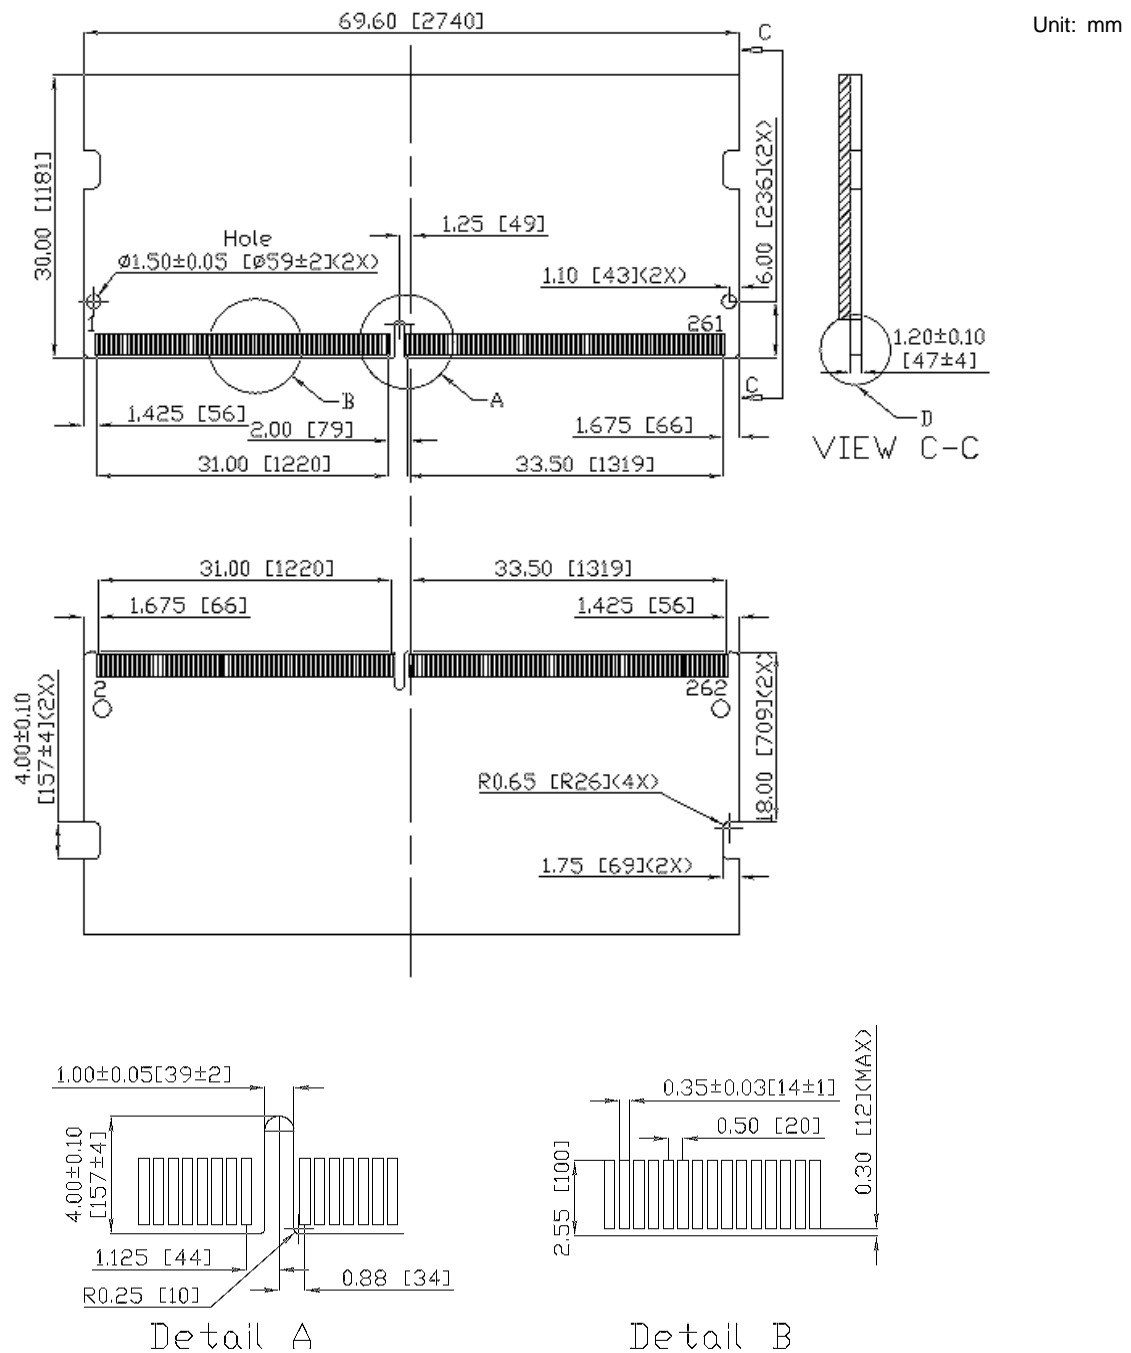

Tolerances: ± 0.15 mm unless otherwise specified